


## Roulement conique 475-472A-TIMKEN - 475-472A-TIMKEN

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/conique/475-472a-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE ROW • TYPE TS

**TYPE TS**

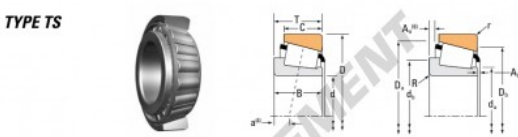

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>1)</sup> C <sub>1</sub>	Factor <sup>2)</sup> f	Dynamic <sup>3)</sup> C <sub>02</sub>	Factor <sup>4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
55.000	120.000	29.000	142000	1.30	32200	26000	1.52	190000	475	472A
2.1654	4.7241	1.1418	32200		6300	5500		41900		

Bearing Dimensions										Geometry Factors			Bearing Weight
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>	
Width B	Width C	ER. Dr. e <sup>1)</sup>	Max Shaft Fillet Radius R <sup>2)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max Housing Fillet Radius r <sup>3)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>4)</sup>	A <sub>2</sub> <sup>5)</sup>	A <sub>3</sub> <sup>6)</sup>				kg
29.000	25.400	-0.1	0.8	66.0	0.3	116.0	1.5	2.2	77.3	23.0	0.1083	1.62	
1.1420	0.9920	-0.16	0.03	2.60	0.13	4.49	0.05	0.09				3.57	

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952317557
Diam. intérieur	55 mm
Diam. intérieur	2.165" inch
Diam. extérieur	120 mm
Diam. extérieur	4.724" inch
Epaisseur	29 mm
Epaisseur	1.142" inch
Poids	1620 g
Conditionnement	1
Norme	Sans norme

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE