


## Roulement conique 42376-42584-TIMKEN - 42376-42584-TIMKEN

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/conique/42376-42584-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

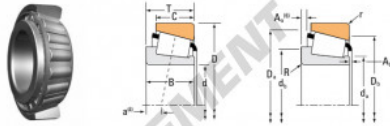

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(3)</sup> C <sub>02</sub>	Factor <sup>(3)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
95.250	148.430	28.575	19300	1.10	9190	4230	24100	4236	42584	
3.750	5.8437	1.1265	4360		1130	560	5400			

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(1)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sup>(1)</sup>	Backing Shoulder Dia. D <sub>s</sub>	A <sub>1</sub> <sup>(2)</sup>	A <sub>2</sub> <sup>(2)</sup>	A <sub>3</sub> <sup>(2)</sup>				G <sub>1</sub>	G <sub>2</sub>
28.571	25.430	3.6	3.5	103.0	105.0	3.0	142.0	134.0	2.8	3.8	128.7	37.2	0.1368	1.23
1.1408	0.9426	0.12	0.14	4.06	4.25	0.12	5.59	5.28	0.11	0.12				2.80

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952323657
Diam. intérieur	95.25 mm
Diam. extérieur	148.43 mm
Épaisseur	28.575 mm
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE