


Roulement conique EE275105-275160-TIMKEN - EE275105-275160-TIMKEN

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/conique/ee275105-275160-timken>

TAPERED ROLLER BEARINGS
SINGLE ROW • TYPE TS

TYPE TS

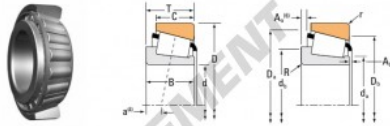

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|--------------------|---------|---------|--|----------------------------|--|----------------------------|--------------------------|-------|-------------|--|
| Bore d | O.D. D | Width B | Dynamic ⁽¹⁾ C ₁ | Factor ⁽²⁾ K | Dynamic ⁽³⁾ C ₂ | Factor ⁽⁴⁾ K | Static C ₀ | Inner | Outer | |
| mm | mm | mm | N | | N | | N | | | |
| 266.700 | 406.400 | 69.850 | 190000 | 1.10 | 262000 | 1.10 | 190000 | | EE275105 | |
| 15.5000 | 16.0000 | 2.7500 | 235000 | | 59000 | | 30800 | | 275160 | |

| Bearing Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight | |
|--------------------|---------|--------------------------|--|--|---|--|-------------------------------|-------------------------------|------|------------------|----------------|----------------|----------------|-------|
| Shaft | | | | | Housing | | | | | G ₁ | G ₂ | C ₃ | | |
| Width B | Width C | ER. Dr. α ⁽¹⁾ | Max. Shaft Fillet Radius R ₁ ⁽²⁾ | Backling Shoulder Dia. d _s ⁽³⁾ | Max. Housing Fillet Radius r ⁽⁴⁾ | Backling Shoulder Dia. D _s ⁽⁵⁾ | A ₁ ⁽⁶⁾ | A ₂ ⁽⁷⁾ | Cage | | | | kg | |
| 69.850 | 46.696 | 2.5 | 6.4 | 267.0 | 256.6 | 6.4 | 376.5 | 376.0 | 14.4 | 3.3 | 1451.8 | 201.3 | 0.1555 | 26.88 |
| 2.7500 | 1.8125 | 0.10 | 0.25 | 11.30 | 11.65 | 0.25 | 14.90 | 14.69 | 0.56 | 0.13 | | | | 63.07 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952328805 |
| Diam. intérieur | 266.7 mm |
| Diam. extérieur | 406.4 mm |
| Épaisseur | 69.85 mm |
| Conditionnement | 1 |

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE