


Roulement conique 3479-3420-B-TIMKEN - 3479-3420-B-TIMKEN

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/conique/3479-3420-b-timken>

TAPERED ROLLER BEARINGS
TYPE TSF

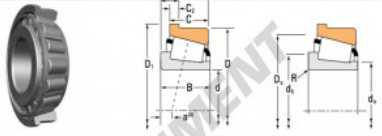

| Bearing Dimensions | | | | Load Ratings | | | | | | | Part Number | |
|--------------------|-----------|------------|--|--|-----------------------------|------|---|-----------------------------|--------------------------|-------|-------------|--|
| Bore d | O.D. D | Width B | | Dynamic ⁽¹⁾ C ₁ | Factors ⁽¹⁾ e | Y | Dynamic ⁽²⁾ C ₀₂ | Factors ⁽²⁾ K | Static C ₀ | Inner | Outer | |
| mm | mm | mm | | N | | | N | | N | | | |
| 36.512 | 79.375 | 10.32 | | 10000 | 0.33 | 1.94 | 27100 | 1700 | 11000 | 3479 | 3420-B | |
| 1.4375 | 3.1250 | 0.4093 | | 2330 | | | 6100 | 3620 | 2600 | | | |

| Bearing Dimensions | | | | | | | Shaft | | | Housing | | Geometry Factors | | | Bearing Weight |
|--------------------|------------|-----------------------------|--|-----------------------------------|---|--|--|----------------|----------------|----------------|--------|------------------|--|------|----------------|
| Width B | Width C | Eff. Dia. d ₁ | Outer Ring Ridge O.D. D ₁ | Flange Width C ₁ | Max Shaft File Radius (R ⁽¹⁾) | Sealing Shoulder Dia. d ₂ | Sealing Shoulder Dia. D ₁ | G ₁ | G ₂ | C ₀ | | | | kg | |
| mm | mm | mm | mm | mm | mm | mm | mm | | | | | | | lbs. | |
| 20.771 | 23.812 | -4.6 | 86.008 | 4.702 | 0.8 | 84.5 | 85.5 | 76.0 | 29.9 | 11.2 | 0.0181 | | | 0.75 | |
| 1.1721 | 0.9375 | -0.34 | 3.3900 | 0.1875 | | 1.75 | 1.79 | 2.99 | | | | | | 1.56 | |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952336336 |
| Diam. intérieur | 36.512 mm |
| Diam. extérieur | 79.375 mm |
| Épaisseur | 10.32 mm |
| Conditionnement | 1 |

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE