


Roulement à aiguilles GBRI102216-UU-IKO - GBRI102216-UU-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/aiguilles/gbri102216-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

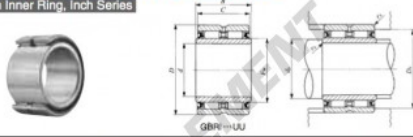

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)				
	With two seals	With one seal		<i>d</i>	<i>D</i>	<i>C</i>		
15.875 ($\frac{5}{8}$)	GBRI 102216 UU		127	15.875 ($\frac{5}{8}$)	34.925 ($1\frac{1}{4}$)	25.400 (1)		
<i>B</i>	<i>F_w</i>	Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring
		Min.	Max.	<i>r_s</i> max. ⁽¹⁾				
25.650	22.225 ($\frac{7}{8}$)	21	21.2	30	28 600	40 100	3 500	LRBZ 101416

Notes: (1) Minimum allowable value of chamfer dimension *r*.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383316
Diam. intérieur	15.875 mm
Diam. extérieur	34.925 mm
Épaisseur	25.4 mm
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE