


## Roulement à aiguilles GBRI142620-U-IKO - GBRI142620-U-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/aiguilles/gbri142620-u-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

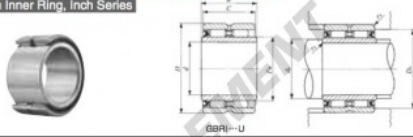

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
22.225 ( $\frac{7}{8}$ )	GBRI 142620 U		200	22.225 ( $\frac{7}{8}$ )	41.275 (1 $\frac{3}{4}$ )	31.750 (1 $\frac{1}{4}$ )			
B	F <sub>w</sub>	Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring		
		d <sub>s</sub> Min.	d <sub>s</sub> Max.					D <sub>s</sub> Max.	r <sub>as</sub> max. <sup>(1)</sup>
32.000	28.575 (1 $\frac{1}{4}$ )	27	27.5	36.3	0.6	43 900	75 300	3 000	LRBZ 141820

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383347
Diam. intérieur	22.225 mm
Diam. extérieur	41.275 mm
Épaisseur	31.75 mm
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE