


Roulement à aiguilles GBR1203320-UU-IKO - GBR1203320-UU-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/aiguilles/gbri203320-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

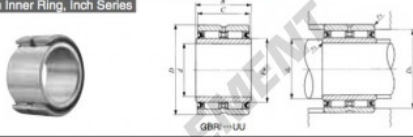

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		<i>d</i>	<i>D</i>	<i>C</i>			
31.750 (1 1/4)	GBR1 203320 UU		286	31.750 (1 1/4)	52.388 (2 1/8)	31.750 (1 1/4)			
<i>B</i>	<i>F_w</i>	Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min. <i>d_s</i>	Max. <i>d_s</i>	Max. <i>D_s</i>					<i>r_{as max}</i> ⁽¹⁾
32.000	38.100 (1 1/2)	37	37.1	47.3	0.6	54 200	97 700	2 000	LRBZ 202420

Note⁽¹⁾ Minimum allowable value of chamfer dimension *r*
 Note⁽²⁾ Allowable rotational speed applies to grease lubrication.
 Remark: This outer ring has an oil groove and an oil hole.
 2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383408
Diam. intérieur	31.75 mm
Diam. extérieur	52.388 mm
Épaisseur	31.75 mm
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE