


Roulement à aiguilles GBR1284828-UU-IKO - GBR1284828-UU-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/aiguilles/gbr1284828-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

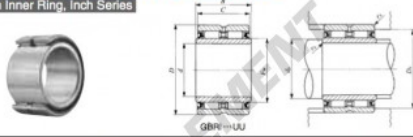

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
44.450 (1 3/4)	GBR1284828 UU		860	44.450 (±0.01)	76.200 (±0.01)	44.450 (±0.01)			
B	F_w	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	$r_{as max}$ ⁽¹⁾					
44.700	57.150 (±0.01)	52.5	55	69.2	1.5	87 500	161 000	1 400	LRBZ 283628

Notes: (1) Minimum allowable value of chamfer dimension r .
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383514
Diam. intérieur	44.45 mm
Diam. intérieur	1 3/4" inch
Diam. extérieur	76.2 mm
Diam. extérieur	3" inch
Epaisseur	44.45 mm
Epaisseur	1 3/4" inch
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE