


Roulement à aiguilles NBXI1223Z-IKO - NBXI1223Z-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/aiguilles/nbxi1223z-iko>

LINEAR TYPE NEEDLE ROLLER BEARINGS

Needle Bearings with Thrust Ball Bearing **With Inner Ring**
Needle Bearings with Thrust Roller Bearing **With Inner Ring**

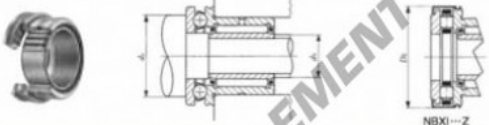

Identification number														
Mass (Ref.) g			With dust cover			Mass (Ref.) g			Mass (Ref.) g			d		
---			---			---			NBXI 1223Z				63	12
Boundary dimensions mm					Bore diameter mm		Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed ⁽¹⁾ rpm	Assemble		
B	H	I ₁	(¹) r _{min}	r _{max}	d ₁	d ₂	Radial	Axial	Radial	Axial				
16.5	9	6.5	0.3	0.3	15	15	26	14	12 300	10 200	14 900	23 900	14 000	LRT 1

Minimum allowable value of chamfer dimension r
Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 70% of this value is allowable in IAX series, and a maximum of 25% of this value is allowable in the NBXI series.
The outer ring has an oil groove and an oil hole.
Grease is not prepacked. Perform proper lubrication.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952390710
Diam. intérieur	12 mm
Diam. extérieur	24 mm
Épaisseur	23 mm
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE