


## Rotule GE SBB44-IKO - SBB44-IKO

<https://www.123roulement.com/roulement-palier/rotule/ge/sbb44-iko>

**IKO**  
**SPHERICAL BUSHINGS**  
Steel-on-steel Spherical Bushings Inch Series

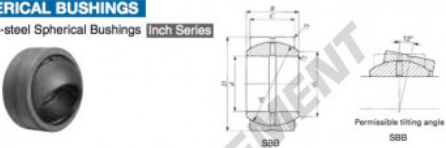

Shaft dia. mm (inch)	Identification number		Mass (Ref.) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		$d$	$D$	$B$	$C$
<b>69.850</b> (2 3/4)	<b>SBB 44</b>		2.44	69.850 (2 3/4)	111.125 (4 3/8)	61.11 (2.406)	52.37 (2.062)
$d_k$	Radial internal clearance mm		Mounting dimensions mm		Dynamic load capacity $C_d$ N	Static load capacity $C_s$ N	
	Min.	Max.	$d_1$	$r_1$ Max. $r_2$ Max.			
100(3.937)	0.10	0.20	79.0	0.6 0.8	514 000	3 080 000	

Notes: (1) Minimum allowable value of chamfer dimensions  $r_1$  and  $r_2$ .  
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of  $d_k$ .  
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.  
2. Not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952392905
Diam. intérieur	69.85 mm
Diam. extérieur	111.125 mm
Épaisseur	61.11 mm
Type	GE
Lubrification	sans
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE