


Rotule GE SBB60-2RS-IKO - SBB60-2RS-IKO

<https://www.123roulement.com/roulement-palier/rotule/ge/sbb60-2rs-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings Inch Series

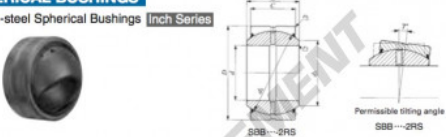

Shaft dia. mm (inch)	Identification number		Mass (Ref.) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		<i>d</i>	<i>D</i>	<i>B</i>	<i>C</i>
95.250 (3 7/8)		SBB 60-2RS	5.87	95.250 (3 7/8)	149.225 (5 7/8)	83.34 (3.281)	71.42 (2.812)
<i>d_k</i>	Radial internal clearance mm		Mounting dimensions mm		Dynamic load capacity <i>C_d</i> N	Static load capacity <i>C_s</i> N	
	Min.	Max.	<i>d₁</i>	<i>r₁</i> Max. ⁽¹⁾ <i>r₂</i> Max. ⁽²⁾			
137(5.394)	0.13	0.23	108.4	0.6	0.8	960 000	5 760 000

Notes: (1) Minimum allowable value of chamfer dimensions *r₁* and *r₂*.
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of *d_k*.
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952392998
Diam. intérieur	95.25 mm
Diam. extérieur	149.225 mm
Épaisseur	83.34 mm
Type	GE
Lubrification	sans
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE