


## Galet de came avec axe CFES12-BR-IKO - CFES12-BR-IKO

<https://www.123roulement.com/roulement-palier/roulement-bille/galet-came-axe/cfes12-br-iko>



### CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Hexagon Hole

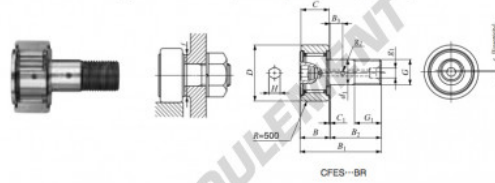

| Stud dia.<br>mm          | Identification number      |      |                                |                |                            |                |                                |                | Mass<br>(Ref.)<br>g | D                | C   | d <sub>1</sub> |      |                |       |                |       |   |   |  |
|--------------------------|----------------------------|------|--------------------------------|----------------|----------------------------|----------------|--------------------------------|----------------|---------------------|------------------|-----|----------------|------|----------------|-------|----------------|-------|---|---|--|
|                          | Shield type                |      |                                |                | Sealed type                |                |                                |                |                     |                  |     |                |      |                |       |                |       |   |   |  |
|                          | With crowned<br>outer ring |      | With cylindrical<br>outer ring |                | With crowned<br>outer ring |                | With cylindrical<br>outer ring |                |                     |                  |     |                |      |                |       |                |       |   |   |  |
| 12                       | CFES 12 BR                 |      |                                |                |                            |                |                                |                | 95                  | 30               | 14  | 12             |      |                |       |                |       |   |   |  |
| Boundary dimensions (mm) |                            |      |                                |                |                            |                |                                |                |                     |                  |     |                |      |                |       |                |       |   |   |  |
| G                        | G <sub>1</sub>             | B    | B <sub>1</sub>                 | B <sub>2</sub> | B <sub>3</sub>             | C <sub>1</sub> | g <sub>1</sub>                 | g <sub>2</sub> | H                   | H <sub>max</sub> | E   | f              | C    | C <sub>0</sub> | C     | C <sub>0</sub> | N     | N | N |  |
| M12×1.5                  | 13                         | 15.2 | 40.2                           | 25             | 6                          | 0.6            | 6                              | 3              | 6                   | 0.6              | 0.4 | 21             | 21.9 | 7 910          | 9 790 | 9 790          | 9 790 |   |   |  |

## CARACTÉRISTIQUES PRODUIT

|                 |               |
|-----------------|---------------|
| Marque          | IKO           |
| N° Ean13        | 3663952443539 |
| Diam. intérieur | 12 mm         |
| Diam. extérieur | 30 mm         |
| Épaisseur       | 14 mm         |
| Conditionnement | 1             |

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE