


Galet de came avec axe CFE10-VUUR-IKO - CFE10-VUUR-IKO

<https://www.123roulement.com/roulement-palier/roulement-bille/galet-came-axe/cfe10-vuur-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

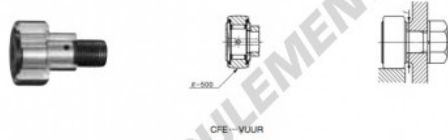

| Outside diameter of eccentric axle mm | Identification number | | | | Mass (Ref.) g | D | C | d _e |
|--|-------------------------|-----------------------------|-------------------------|-----------------------------|------------------|----|----|----------------|
| | Shield type | | Sealed type | | | | | |
| | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | | | | |
| 13 | | | CFE 10 | VUUR | 50.5 | 22 | 12 | 13 |

| Boundary dimensions mm | | | | | | | | | | Mounting dimension f Min. mm | Maximum ignoring torque N·m | Basic dynamic load rating C N | Basic static load rating C ₀ N | Maximum allowable static load N |
|------------------------|----------------|----------|-----------------------|----------------|----------------|----------------|----------------|-----------------------|-------------------|---------------------------------------|--------------------------------------|--|--|--|
| G | B ₃ | B max | B ₂ max | B ₂ | C ₁ | g ₁ | G ₁ | r ₁ min | Eccentricity E | | | | | |
| M10 × 1.25 | 10.5 | 13.2 | 36.2 | 23 | 0.6 | *4 | 12.5 | 0.3 | 0.4 | 16 | 13.8 | 9 570 | 14 500 | 8 650 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | IKO |
| N° Ean13 | 3616060460950 |
| Diam. intérieur | 13 mm |
| Diam. extérieur | 22 mm |
| Épaisseur | 12 mm |
| Poids | 50.5 g |
| Conditionnement | 1 |

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE