


Galet de came avec axe CFE20-VUU-IKO - CFE20-VUU-IKO

<https://www.123roulement.com/roulement-palier/roulement-bille/galet-came-axe/cfe20-vuu-iko>

IKO
CAM FOLLOWERS
Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

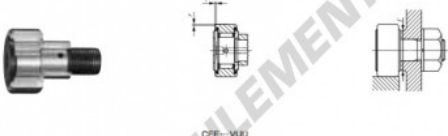

| Outside diameter of eccentric axle mm | Identification number | | | | Mass (Ref.) | | | | | | | | | |
|--|-------------------------|-----------------------------|-------------------------|-----------------------------|----------------|----------------|----------------|-----------------------|-------------------|---------------------------------------|---------------------------------|-------------------------------------|---|------------------------------------|
| | Shield type | | Sealed type | | g | D | C | d _e | | | | | | |
| 27 | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | | | | | CFE 20 VUU | 505 | 52 | 24 | 27 | |
| Boundary dimensions mm | | | | | | | | | | | | | | |
| G | B ₃ | B _{max} | B ₁ max | B ₂ | C ₁ | g ₁ | G ₁ | r ₁ min | Excentricity E | Mounting clearance f Min. mm | Maximum operating torque N·m | Basic dynamic load rating C N | Basic static load rating C ₀ N | Maximum allowable static load N |
| M20 × 1.5 | 19.5 | 25.6 | 66.1 | 40.5 | 0.8 | 8 | 21 | 1 | 0.8 | 34 | 119 | 33 200 | 64 500 | 37 500 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | IKO |
| N° Ean13 | 3616060461193 |
| Diam. intérieur | 27 mm |
| Diam. intérieur | 1.063" inch |
| Diam. extérieur | 52 mm |
| Diam. extérieur | 2.047" inch |
| Epaisseur | 24 mm |
| Epaisseur | 0.945" inch |
| Poids | 505 g |
| Conditionnement | 1 |

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE