


## Galet de came avec axe CR26-UUR-IKO - CR26-UUR-IKO

<https://www.123roulement.com/roulement-palier/roulement-bille/galet-came-axe/cr26-uur-iko>

IKO

### CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

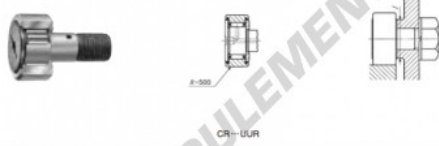

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d <sub>1</sub>	G UNF	G <sub>1</sub>
	Shield type With covered outer ring	Shield type With cylindrical outer ring	Sealed type With covered outer ring	Sealed type With cylindrical outer ring						
15.875 (5/8)			CR 26	UUR	260	41.275 (1 5/8)	22.225 (7/8)	15.875 (5/8)	G <sub>1</sub> -18	19.050 (3/4)
Boundary dimensions (mm/inch)										
B max	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	δ <sub>1</sub>	δ <sub>2</sub>	r	Bearing dimension f Min. mm/inch	Maximum tightening torque C N·m	Basic dynamic load rating C <sub>0</sub> N	Basic static load rating C <sub>0</sub> N
23.8 (9.37)	38.100 (1 1/2)	9.525 (3/8)	0.794 (1/32)	4.702 (3/16)	3.969 (1/8)	1.588 (1/16)	26.199 (1 1/8)	55.7	10 800	24 300

## CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060463012
Diam. intérieur	15.875 mm
Diam. intérieur	5/8" inch
Diam. extérieur	41.275 mm
Diam. extérieur	1 5/8" inch
Epaisseur	22.225 mm
Epaisseur	7/8" inch
Poids	260 g
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE