

Rotule TAPR GIHN-K-32LO-DURBAL - GIHN-K-32LO-DURBAL


<https://www.123roulement.com/roulement-palier/rotule/tapr/gihn-k-32lo-durbal>

GIHN-K-32LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

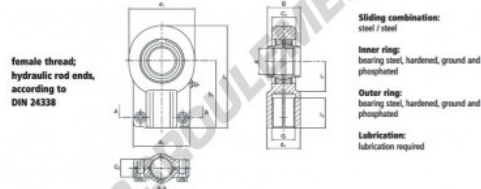

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel

Inner ring:
bearing steel, hardened, ground and
phosphated

Outer ring:
bearing steel, hardened, ground and
phosphated

Lubrication:
lubrication required

| order number | d | d ₁ | measurement [mm] | G | d ₂ | B | C ₁ | C ₂ |
|--------------|----|----------------|------------------|------|----------------|----|----------------|----------------|
| GIHN-K 32 LO | 32 | 71 | M 27 x 2 | 38,0 | 66 | 32 | 28 | 22 |

| type | l ₁ min | measurement [mm] | l ₁ | load rating | weight | |
|------------------------|--------------------|------------------|----------------|--------------------|--------|------|
| | | h ₁ | l ₂ | C ₀ [N] | [kg] | |
| GIHN-K / GIHN-KL 32 LO | 37 | 80 | 118,5 | 32 | 114,0 | 1,20 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|-------------------|
| Marque | DURBAL |
| N° Ean13 | 3663952500188 |
| Diam. intérieur | 32 mm |
| Diam. extérieur | 71 mm |
| Épaisseur | 28 mm |
| Type | TAPR |
| Poids | 1200 g |
| Filetage | Filetage à droite |
| Lubrification | avec |
| Conditionnement | 1 |

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE