

Rotule TAPR GIHN-KL-63LO-DURBAL - GIHN-KL-63LO-DURBAL


<https://www.123roulement.com/roulement-palier/rotule/tapr/gihn-kl-63lo-durbal>

GIHN-KL-63LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

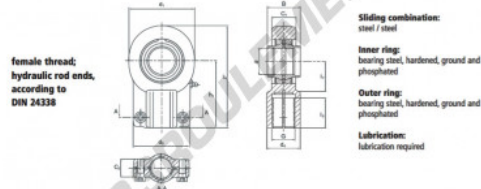

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and
phosphated
Outer ring:
bearing steel, hardened, ground and
phosphated
Lubrication:
lubrication required

| order number | d | d ₁ | measurement [mm] | G | d ₂ | B | C ₁ | C ₂ |
|---------------|----|----------------|------------------|------|----------------|----|----------------|----------------|
| GIHN-KL 63 LO | 63 | 136 | M 48 x 2 | 70,0 | 114 | 63 | 53 | 38 |

| type | l ₁ min | measurement [mm] | l ₂ | l ₃ | load rating | weight |
|------------------------|--------------------|------------------|----------------|----------------|---------------------|--------|
| | | h ₁ | l ₄ | l ₅ | C ₀ [kN] | [kg] |
| GIHN-K / GIHN-KL 63 LO | 64 | 140 | 213,0 | 62 | 430,0 | 7,60 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|-------------------|
| Marque | DURBAL |
| N° Ean13 | 3663952500324 |
| Diam. intérieur | 63 mm |
| Diam. extérieur | 136 mm |
| Epaisseur | 53 mm |
| Type | TAPR |
| Poids | 7600 g |
| Filetage | Filetage à gauche |
| Lubrification | avec |
| Conditionnement | 1 |

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE