


Douille à aiguilles BHAM1610-IKO - BHAM1610-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/douille/bham1610-iko>

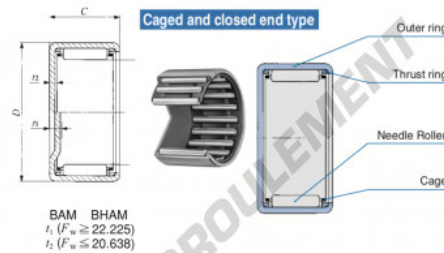

BAM BHAM
 $t_1 (F_{0.2} \geq 22.225)$
 $t_2 (F_{0.2} \leq 20.638)$

Boundary dimensions mm(INCH)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable axial displacement	
F _{0.2}	D	C	i	H	J	K	C		CP		mm(μm)	mm(μm)
							Max.	Min.	Max.	Min.		
21.602 (1)	33.338 (1 1/4)	15.881 (625)	3.4				15300	22100	15000	-		

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060600431
Diam. intérieur	25.4 mm
Diam. extérieur	33.338 mm
Epaisseur	15.88 mm
Vitesse limite	15000 rpm
Charge dynamique	15.3 kN
Charge statique	22.1 kN
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE