


## Douille à aiguilles BAM4420-IKO - BAM4420-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/douille/bam4420-iko>

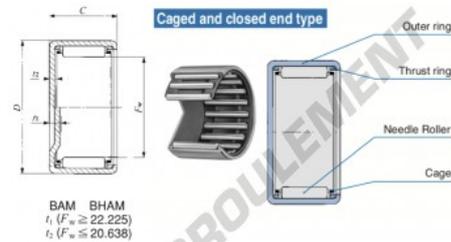

BAM BHAM  
 $t_1 (F_w \geq 22.225)$   
 $t_2 (F_w \leq 20.638)$

Boundary dimensions mm(inch)				Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Adjusted dynamic load rating	Adjusted static load rating
F <sub>w</sub>	D	C	f	Shaft dia.		Housing bore dia.		C	CF	CF	CF
				Max.	Min.	Max.	Min.	H	H	H	CF
68.800 (2.714)	79.375 (3.125)	31.75 (1.250)	2.4					54600	139000	30000	68000

## CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060601070
Diam. intérieur	69.85 mm
Diam. extérieur	79.375 mm
Epaisseur	31.75 mm
Vitesse limite	3500 rpm
Charge dynamique	54.6 kN
Charge statique	139 kN
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE