


Douille à aiguilles BA3010-Z-IKO - BA3010-Z-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/douille/ba3010-z-iko>

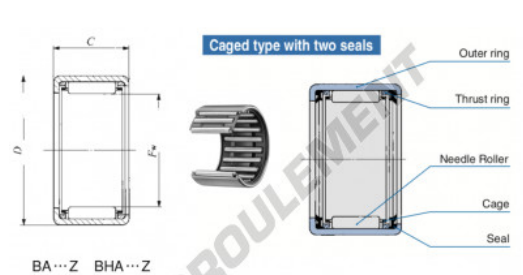

Boundary dimensions mm[inch]		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
F_w	D	C	d	d_1	Housing bore dia.	C	C_0	rpm	
47.625 (1.8 8/16)	57.150 (2 1/4)	15.880 (.625)	2.0						
			Min.	Max.	Min.	N	N	rpm	
						20300	34500	7000	RB 2419-1

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060601551
Diam. intérieur	47.625 mm
Diam. extérieur	57.15 mm
Epaisseur	15.88 mm
Vitesse limite	7000 rpm
Charge dynamique	20.3 kN
Charge statique	34.5 kN
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE