


## Douille à aiguilles BA1212-Z-IKO - BA1212-Z-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/douille/ba1212-z-iko>

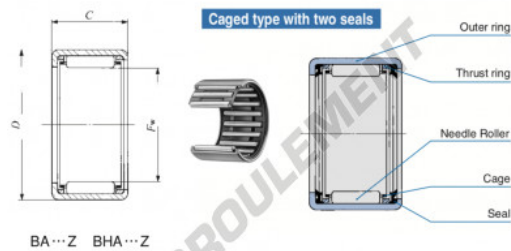

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable	Assembled
$F_w$	$D$	$C$	$r_2$	$b_6$	Housing bore dia.		$C$	$C_0$	speed <sup>(1)</sup>	inner ring	
			Min.	Max.	Min.	Max.	N	N	rpm		
19.050 (0.4)	25.400 (1)	19.050 (0.750)	5.3	19.050	19.037	25.412	25.391	11900	17700	20000	IRB #12-1

## CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060603180
Diam. intérieur	19.05 mm
Diam. extérieur	25.4 mm
Epaisseur	19 mm
Vitesse limite	20000 rpm
Charge dynamique	11 kN
Charge statique	17 kN
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE