


## Roulement à rouleaux NNU4924-JTEKT - NNU4924-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nnu4924-jtekt>

Double-row cylindrical roller bearings Koyo

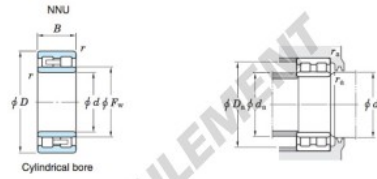

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r min.	F <sub>w</sub>	C <sub>r</sub>	C <sub>107</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
120	165	45	1.1	134.5	—	187	373	3 400	4 000	NN

Mounting dimensions (mm)		Cylindrical bore		Tapered bore		Refer. Mass (kg)	
d <sub>1</sub> min.	d <sub>1</sub> max.	D <sub>1</sub> min.	D <sub>1</sub> max.	r <sub>s</sub> min.	r <sub>s</sub> max.	Cylindrical bore	Tapered bore
126.5	132	137	158.5	—	1	2.90	2.77

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473079
Diam. intérieur	120 mm
Diam. extérieur	165 mm
Épaisseur	45 mm
Poids	2900 g
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE