


Roulement à rouleaux NN3024K-JTEKT - NN3024K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nn3024k-jtekt>

Double-row cylindrical roller bearings 

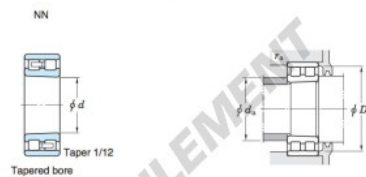

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> min.	<i>F₀₂</i>	<i>C₁₀</i>	<i>C₀₂</i>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
120	180	46	2	165	232	392	3 200	3 900	NN3024K	NN3024K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d_a</i>		<i>D_a</i>		<i>r_a</i>		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		129	—	—	171	167	2	4.00	3.87

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473109
Diam. intérieur	120 mm
Diam. extérieur	180 mm
Épaisseur	46 mm
Poids	3870 g
Conditionnement	1
Norme	Sans norme

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE