


## Roulement à rouleaux NNU4928K-JTEKT - NNU4928K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nnu4928k-jtekt>

### Double-row cylindrical roller bearings Koyo

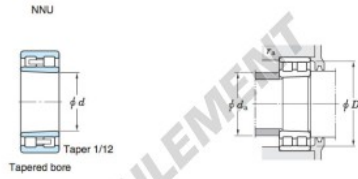

Boundary dimensions (mm)				Basic load ratings (kN)				Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r min.	F <sub>w</sub>	E <sub>w</sub>	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
140	190	50	1.5	156	—	222	456	2 900	3 500		

Mounting dimensions (mm)		Mounting dimensions (mm)				(Refer.) Mass (kg)			
NUU Cylindrical bore	NUU Tapered bore	d <sub>a</sub> min.	d <sub>a</sub> max.	d <sub>s</sub> min.	d <sub>s</sub> max.	D <sub>s</sub> min.	r <sub>s</sub> max.	Cylindrical bore	Tapered bore
		148	153.5	158	182	—	1.5	4.15	3.97

## CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473161
Diam. intérieur	140 mm
Diam. extérieur	190 mm
Épaisseur	50 mm
Poids	3970 g
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE