


Roulement à rouleaux NN3030K-JTEKT - NN3030K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nn3030k-jtekt>

Double-row cylindrical roller bearings 

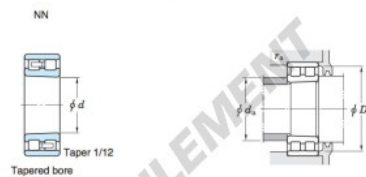

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> min.	<i>F_w</i>	<i>C_r</i>	<i>C_{0r}</i>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
150	225	56	2.1	206	334	587	2 500	3 000	—	—

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d_a</i>		<i>D_a</i>		<i>r_a</i>		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
—	—	161	—	—	214	208	2	7.74	7.50

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473222
Diam. intérieur	150 mm
Diam. extérieur	225 mm
Épaisseur	56 mm
Poids	7500 g
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE