


Roulement à rouleaux NN3032K-JTEKT - NN3032K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nn3032k-jtekt>

Double-row cylindrical roller bearings 

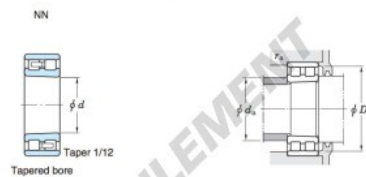

| Boundary dimensions (mm) | | | | Basic load ratings (kN) | | | Limiting speeds (min ⁻¹) | | Bearing No. | |
|--------------------------|-----|-----|-------------|-------------------------|-------|----------|--------------------------------------|-------------|---------------------|-----------------|
| d | D | B | r min. | F_w | C_r | C_{0r} | Grease lub. | Oil lub. | Cylindrical bore | Tapered bore |
| 160 | 240 | 60 | 2.1 | 218 | 398 | 695 | 2 400 | 2 800 | | NN3032K |

| | | Mounting dimensions (mm) | | | | | | (Refer.) Mass (kg) | |
|---------------------|-----------------|--------------------------|------|-------|------|-------|------|---------------------|-----------------|
| Cylindrical bore | Tapered bore | d_a | | D_a | | r_a | | Cylindrical bore | Tapered bore |
| | | min. | max. | min. | max. | min. | max. | | |
| | | 171 | — | — | 229 | 221 | 2 | 9.38 | 9.08 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | JTEKT |
| N° Ean13 | 3663952473260 |
| Diam. intérieur | 160 mm |
| Diam. extérieur | 240 mm |
| Épaisseur | 60 mm |
| Poids | 9080 g |
| Conditionnement | 1 |

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE