


## Roulement à rouleaux NNU4944-JTEKT - NNU4944-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nnu4944-jtekt>

Double-row cylindrical roller bearings 

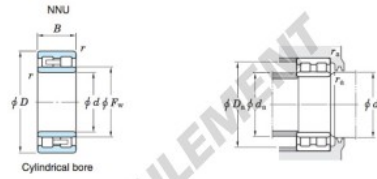

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r	F <sub>w</sub>	C <sub>10</sub>	C <sub>90</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
220	300	80	2.1	244	—	561	1 700	2 000		

Mounting dimensions (mm)		Cylindrical bore		Tapered bore		Refer. Mass (kg)	
d <sub>s</sub>	r <sub>s</sub>	min.	max.	min.	max.	Cylindrical bore	Tapered bore
—	2	231	241	248	289	16.7	16.0

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473437
Diam. intérieur	220 mm
Diam. extérieur	300 mm
Épaisseur	80 mm
Poids	16700 g
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE