


## Roulement à rouleaux NN3009K-JTEKT - NN3009K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nn3009k-jtekt>

Double-row cylindrical roller bearings ——— Koyo

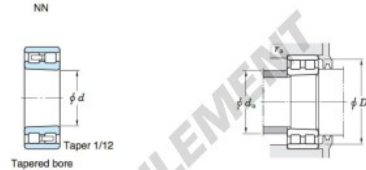

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r min.	F <sub>02</sub>	C <sub>10</sub>	C <sub>09</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
45	75	23	1	—	87.5	53.4	71.9	8 300	9 900	NN3009K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	d <sub>a</sub>		D <sub>a</sub>		r <sub>a</sub>		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		50	—	—	70	69	1	0.404	0.382

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473628
Diam. intérieur	45 mm
Diam. extérieur	75 mm
Épaisseur	23 mm
Poids	382 g
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE