


Roulement à rouleaux NN3016K-JTEKT - NN3016K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nn3016k-jtekt>

Double-row cylindrical roller bearings 

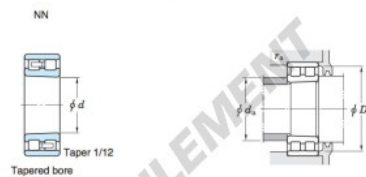

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{min.}	<i>F</i> ₀	<i>C</i> ₀	<i>C</i> ₁₀	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
80	125	34	1.1	113	119	166	4 800	5 800	NN	NN3016K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d</i> _a		<i>D</i> _a		<i>r</i> _a		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		86.5	—	—	118.5	114	1	1.55	1.50

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473758
Diam. intérieur	80 mm
Diam. extérieur	125 mm
Épaisseur	34 mm
Poids	1500 g
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE