


## Roulement à rouleaux NN3019K-JTEKT - NN3019K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nn3019k-jtekt>

Double-row cylindrical roller bearings ————— **Koyo**

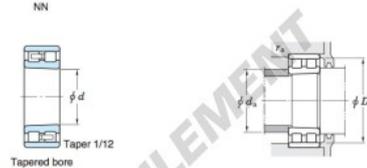

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
$d$	$D$	$B$	$r$ min.	$F_w$	$C_r$	$C_{0r}$	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
95	145	37	1.5	—	132	150	246	4 100	4 900	<b>NN3019K</b>

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	$d_a$		$d_{a1}$		$D_a$	$r_a$	Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		103	—	—	137	134	1.5	2.17	2.10

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473819
Diam. intérieur	95 mm
Diam. intérieur	3.74" inch
Diam. extérieur	145 mm
Diam. extérieur	5.709" inch
Epaisseur	37 mm
Epaisseur	1.457" inch
Poids	2100 g
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE