


Roulement à rouleaux NN3060K-JTEKT - NN3060K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nn3060k-jtekt>

Double-row cylindrical roller bearings — Koyo

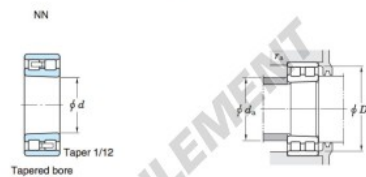

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.				
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> min.	<i>F_w</i>	<i>E_w</i>	<i>C_r</i>	<i>C_{0r}</i>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore		
300	460	118	4	—	418	1 290	2 460	1 100	1 300	—	—		
				Mounting dimensions (mm)				(Refer.) Mass (kg)					
Cylindrical bore		Tapered bore		<i>d_a</i> min.	<i>d_a</i> max.	<i>d_a</i> min.	<i>d_a</i> max.	<i>D_a</i> min.	<i>D_a</i> max.	<i>r_a</i> min.	<i>r_a</i> max.	Cylindrical bore	Tapered bore
				316	—	—	444	421	3			70.8	68.7

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952474014
Diam. intérieur	300 mm
Diam. extérieur	460 mm
Épaisseur	118 mm
Poids	68700 g
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE