


Roulement à rouleaux NCF2922CV-SKF - NCF2922CV-SKF

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/ncf2922cv-skf>

Dimensions d'encombrement			Charges de base		Vitesses de base		Désignation
d	D	B	dynamique C	statique C ₀	Vitesse de référence tr/min	Vitesse limite	
mm			kN				
110	150	24	134	220	1900	2400	NCF 2922 CV

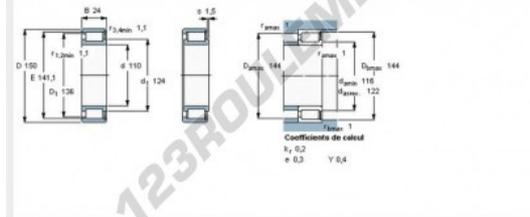

Technical drawing showing dimensions and coefficients for the NCF 2922 CV roller bearing. Dimensions include: d = 110 mm, D = 150 mm, B = 24 mm, r₁ = 1.3 mm, r₂ = 1.3 mm, r₃ = 1.3 mm, r₄ = 1.3 mm, r₅ = 1.3 mm, r₆ = 1.3 mm, r₇ = 1.3 mm, r₈ = 1.3 mm, r₉ = 1.3 mm, r₁₀ = 1.3 mm, r₁₁ = 1.3 mm, r₁₂ = 1.3 mm, r₁₃ = 1.3 mm, r₁₄ = 1.3 mm, r₁₅ = 1.3 mm, r₁₆ = 1.3 mm, r₁₇ = 1.3 mm, r₁₈ = 1.3 mm, r₁₉ = 1.3 mm, r₂₀ = 1.3 mm, r₂₁ = 1.3 mm, r₂₂ = 1.3 mm, r₂₃ = 1.3 mm, r₂₄ = 1.3 mm, r₂₅ = 1.3 mm, r₂₆ = 1.3 mm, r₂₇ = 1.3 mm, r₂₈ = 1.3 mm, r₂₉ = 1.3 mm, r₃₀ = 1.3 mm, r₃₁ = 1.3 mm, r₃₂ = 1.3 mm, r₃₃ = 1.3 mm, r₃₄ = 1.3 mm, r₃₅ = 1.3 mm, r₃₆ = 1.3 mm, r₃₇ = 1.3 mm, r₃₈ = 1.3 mm, r₃₉ = 1.3 mm, r₄₀ = 1.3 mm, r₄₁ = 1.3 mm, r₄₂ = 1.3 mm, r₄₃ = 1.3 mm, r₄₄ = 1.3 mm, r₄₅ = 1.3 mm, r₄₆ = 1.3 mm, r₄₇ = 1.3 mm, r₄₈ = 1.3 mm, r₄₉ = 1.3 mm, r₅₀ = 1.3 mm, r₅₁ = 1.3 mm, r₅₂ = 1.3 mm, r₅₃ = 1.3 mm, r₅₄ = 1.3 mm, r₅₅ = 1.3 mm, r₅₆ = 1.3 mm, r₅₇ = 1.3 mm, r₅₈ = 1.3 mm, r₅₉ = 1.3 mm, r₆₀ = 1.3 mm, r₆₁ = 1.3 mm, r₆₂ = 1.3 mm, r₆₃ = 1.3 mm, r₆₄ = 1.3 mm, r₆₅ = 1.3 mm, r₆₆ = 1.3 mm, r₆₇ = 1.3 mm, r₆₈ = 1.3 mm, r₆₉ = 1.3 mm, r₇₀ = 1.3 mm, r₇₁ = 1.3 mm, r₇₂ = 1.3 mm, r₇₃ = 1.3 mm, r₇₄ = 1.3 mm, r₇₅ = 1.3 mm, r₇₆ = 1.3 mm, r₇₇ = 1.3 mm, r₇₈ = 1.3 mm, r₇₉ = 1.3 mm, r₈₀ = 1.3 mm, r₈₁ = 1.3 mm, r₈₂ = 1.3 mm, r₈₃ = 1.3 mm, r₈₄ = 1.3 mm, r₈₅ = 1.3 mm, r₈₆ = 1.3 mm, r₈₇ = 1.3 mm, r₈₈ = 1.3 mm, r₈₉ = 1.3 mm, r₉₀ = 1.3 mm, r₉₁ = 1.3 mm, r₉₂ = 1.3 mm, r₉₃ = 1.3 mm, r₉₄ = 1.3 mm, r₉₅ = 1.3 mm, r₉₆ = 1.3 mm, r₉₇ = 1.3 mm, r₉₈ = 1.3 mm, r₉₉ = 1.3 mm, r₁₀₀ = 1.3 mm. Coefficients of calculation: k₁ = 0.2, k₂ = 0.3, Y = 0.4.

CARACTÉRISTIQUES PRODUIT

Marque	SKF
N° Ean13	7316572305607
Diam. intérieur	110 mm
Diam. extérieur	150 mm
Épaisseur	24 mm
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE