


Roulement à aiguilles TRI405930-IKO - TRI405930-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/aiguilles/tri405930-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Inner Ring

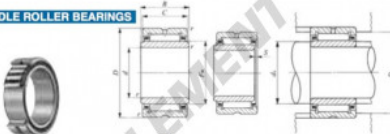

Shaft dia. mm	Identification number						Mass (Ref.) g	d				
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI						
40	—	—	—	—	TRI 405930	—	270	40				
Boundary dimensions mm		Standard mounting dimensions mm			Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽¹⁾	Assembled inner ring				
D	C	B	r _s min ⁽²⁾	r _w S ⁽³⁾	Min. d _s	Max. d _s	D _s Max.	N	N	rpm	LRT 404530-1	
59	30	30.5	0.6	45	1	44	44.5	55	55 100	94 800	9 000	

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952371641
Diam. intérieur	40 mm
Diam. extérieur	59 mm
Épaisseur	30 mm
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE