

## Rotule TAPR DGIHN-KL-12LO-DURBAL - DGIHN-KL-12LO-DURBAL


<https://www.123roulement.com/roulement-palier/rotule/tapr/dgihn-kl-12lo-durbal>

### DGIHN-KL-12LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE... LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

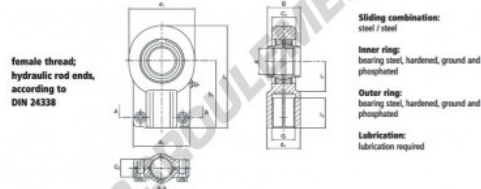

female thread:  
hydraulic rod ends,  
according to  
DIN 24338

Sliding combination:  
steel / steel  
Inner ring:  
bearing steel, hardened, ground and  
phosphated  
Outer ring:  
bearing steel, hardened, ground and  
phosphated  
Lubrication:  
lubrication required

order number	d	d <sub>1</sub>	measurement [mm]	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>
right hand thread	12	32	M 12 x 1,25	16,5	32	12	11
DGIHN-KL 12 LO*							

type	l <sub>1</sub> min	measurement [mm]	l <sub>2</sub>	l <sub>3</sub>	load rating	weight
DGIHN-K / DGIHN-KL 12 LO*	17	38	54,0	14	24,5	0,10

## CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952500041
Diam. intérieur	12 mm
Diam. intérieur	0.472" inch
Diam. extérieur	32 mm
Diam. extérieur	1.26" inch
Epaisseur	11 mm
Epaisseur	0.433" inch
Type	TAPR
Poids	100 g
Filetage	Filetage à gauche
Lubrification	avec
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE