


Roulement à rouleaux NN3034K-JTEKT - NN3034K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nn3034k-jtekt>

Double-row cylindrical roller bearings 

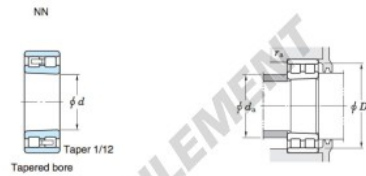

| Boundary dimensions (mm) | | | | Basic load ratings (kN) | | | Limiting speeds (min ⁻¹) | | Bearing No. | |
|--------------------------|-----|----|-----|-------------------------|----------------|-----------------|--------------------------------------|----------|------------------|--------------|
| d | D | B | r | F _w | C _r | C _{0r} | Grease lub. | Oil lub. | Cylindrical bore | Tapered bore |
| 170 | 260 | 67 | 2.1 | 236 | 471 | 824 | 2 200 | 2 600 | NN | NN3034K |

| | | Mounting dimensions (mm) | | | | | | (Refer.) Mass (kg) | |
|------------------|--------------|--------------------------|------|----------------|------|----------------|------|--------------------|--------------|
| Cylindrical bore | Tapered bore | d _a | | D _a | | r _a | | Cylindrical bore | Tapered bore |
| | | min. | max. | min. | max. | min. | max. | | |
| | | 181 | — | — | 249 | 238 | 2 | 12.8 | 12.4 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | JTEKT |
| N° Ean13 | 3663952473307 |
| Diam. intérieur | 170 mm |
| Diam. extérieur | 260 mm |
| Épaisseur | 67 mm |
| Poids | 12400 g |
| Conditionnement | 1 |

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE