


Roulement à rouleaux NN3020K-JTEKT - NN3020K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nn3020k-jtekt>

Double-row cylindrical roller bearings 

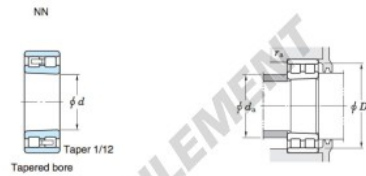

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.	
d	D	B	r	F _w	C _r	C _{0r}	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
100	150	37	1.5	137	157	265	3 900	4 700	NN	NN3020K

		Mounting dimensions (mm)					(Refer.) Mass (kg)		
Cylindrical bore	Tapered bore	d _a		D _a		r _a	Cylindrical bore	Tapered bore	
		min.	max.	min.	max.				
		108	—	—	142	139	1.5	2.28	2.21

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473857
Diam. intérieur	100 mm
Diam. extérieur	150 mm
Épaisseur	37 mm
Poids	2210 g
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE