


Roulement à rouleaux NNU4922-JTEKT - NNU4922-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nnu4922-jtekt>

Double-row cylindrical roller bearings Koyo

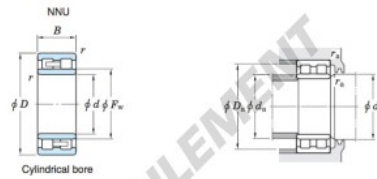

Boundary dimensions (mm)				Basic load ratings (kN)				Limiting speeds (min ⁻¹)		Bearing No.	
d	D	B	r min.	F_w	E_w	C_r	C_{0r}	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
110	150	40	1.1	123	—	183	326	3 700	4 500		

Mounting dimensions (mm)		Mounting dimensions (mm)				(Refer.) Mass (kg)			
NUU Cylindrical bore	NUU Tapered bore	d_a min.	d_a max.	d_b min.	d_b max.	D_a min.	r_a max.	Cylindrical bore	Tapered bore
		116.5	121	125	143.5	—	1	2.10	2.01

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473901
Diam. intérieur	110 mm
Diam. extérieur	150 mm
Épaisseur	40 mm
Poids	2100 g
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE