


## Roulement conique 622X-614X-TIMKEN - 622X-614X-TIMKEN

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/conique/622x-614x-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

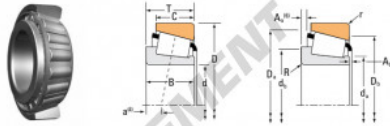

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Factor <sup>(3)</sup> f	Dynamic <sup>(1)</sup> C <sub>02</sub>	Factor <sup>(3)</sup> K	Static C <sub>0</sub>	Inner	Outer
mm	mm	mm	N			N		N		
58.000	115.000	41.021	20700	2.31	1.01	5200	2000	1.88	24000	622X 614X
2.1854	4.5276	1.6153	4650			12100	6516		5400	

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(1)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max Housing Fillet Radius r <sup>(1)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>	A <sub>3</sub> <sup>(1)</sup>				G <sub>1</sub>	G <sub>2</sub>
41.275	35.496	-14.8	3.8	64.8	35.8	3.8	108.8	101.8	3.8	1.8	75.3	18.2	0.984	1.90
1.6250	1.3900	-0.55	0.12	2.52	2.78	0.12	4.25	2.98	0.15	0.09				4.18

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952317540
Diam. intérieur	55 mm
Diam. extérieur	115 mm
Épaisseur	41.021 mm
Poids	1900 g
Conditionnement	1
Norme	Sans norme

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE