


## Roulement conique 495AA-493-TIMKEN - 495AA-493-TIMKEN

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/conique/495aa-493-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

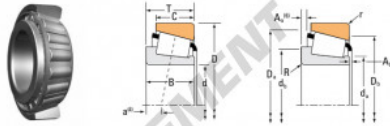

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> K	Dynamic <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
66.675	136.525	30.162	154000	1.31	40000	30000	210000	495AA	493	
2.6250	5.3750	1.1875	24700		9000	6900	48000			

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage				
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>4</sub>	Max Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(4)</sup>	A <sub>2</sub> <sup>(5)</sup>	A <sub>3</sub> <sup>(6)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>1</sub>		
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				kg	
26.789	22.225	-0.8	3.5	78.8	85.8	3.3	138.8	122.8	2.3	2.2	104.6	26.3	0.1262	2.88
1.1720	0.8750	-0.03	0.14	3.07	3.35	0.13	5.12	4.80	0.09	0.09			4.51	

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952320151
Diam. intérieur	66.675 mm
Diam. extérieur	136.525 mm
Épaisseur	30.162 mm
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE