


## Roulement conique 6460-6420-TIMKEN - 6460-6420-TIMKEN

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/conique/6460-6420-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

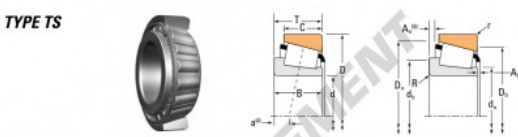

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>1)</sup> C <sub>1</sub>	Factor <sup>2)</sup> Y	Dynamic <sup>3)</sup> C <sub>2</sub>	Factor <sup>4)</sup> X	Static <sup>5)</sup> C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
73.025	149.225	53.975	41100	2.30	10700	6800	1.61	40300	6460	6420
2.6750	5.8750	2.1250	5250		2400	1480		10400		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage	G <sub>1</sub>	G <sub>2</sub>		C <sub>3</sub>
Width B	Width C	ER. Dr. α <sup>6)</sup>	Max. Shaft Fillet Radius R <sup>7)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max. Housing Fillet Radius r <sup>8)</sup>	Backing Shoulder Dia. D <sub>1</sub>	Shoulder Dia. D <sub>2</sub>	A <sub>1</sub> <sup>9)</sup>	A <sub>2</sub> <sup>10)</sup>				A <sub>3</sub> <sup>11)</sup>	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
54.225	64.400	-15.8	3.5	87.8	83.8	3.3	140.8	120.8	2.7	8.7	158.3	20.1	0.9201	6.40
2.1250	1.7500	-0.58	0.14	3.43	3.38	0.13	5.51	5.08	0.10	0.03				9.71

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952321240
Diam. intérieur	73.025 mm
Diam. extérieur	149.225 mm
Épaisseur	53.975 mm
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE