


## Roulement conique 595-592AS-TIMKEN - 595-592AS-TIMKEN

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/conique/595-592as-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

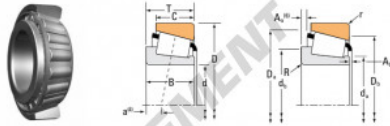

Bearing Dimensions			Load Ratings						Part Number		
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> Y	Dynamic <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Inner	Outer		
mm	mm	mm	N		N		N				
82.550	152.400	35.717	216000	2.94	1.26	90000	42000	1.32	219000	506	592AS
3.2500	6.0000	1.4082	48000			12600	9530		71600		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft		Housing		Cage					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>			
Width B	Width C	ER. Dr. e <sup>(1)</sup>	Max. Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max. Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(4)</sup>	A <sub>2</sub> <sup>(5)</sup>						
36.322	26.192	-3.5	3.5	53.0	190.0	0.8	144.0	137.0	4.1	1.3	151.4	36.3	0.1418	2.81
1.4300	1.0312	-0.10	0.14	3.06	3.94	0.03	5.67	5.29	0.16	0.07				6.19

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952322476
Diam. intérieur	82.55 mm
Diam. intérieur	3 1/4" inch
Diam. extérieur	152.4 mm
Diam. extérieur	6" inch
Epaisseur	35.717 mm
Epaisseur	1 13/32" inch
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE