


Roulement conique 2684-2631-B-TIMKEN - 2684-2631-B-TIMKEN

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/conique/2684-2631-b-timken>

TAPERED ROLLER BEARINGS
TYPE TSF

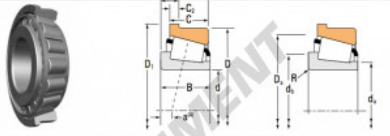

| Bearing Dimensions | | | | | Load Ratings | | | | | Part Number | |
|--------------------|-----------|------------|--|-----------------------------|---|-----------------------------|--------------------------|-------|-------|-------------|--------|
| Bore d | O.D. D | Width B | Dynamic ⁽¹⁾ C ₁ | Factors ⁽¹⁾ e | Dynamic ⁽²⁾ C ₀₂ | Factors ⁽²⁾ K | Static C ₀ | Inner | Outer | | |
| mm | mm | mm | N | | N | | N | | | | |
| 22.225 | 66.421 | 8.725 | 7850 | 0.25 | 12000 | 0.40 | 12000 | 1540 | 1540 | 2684 | 2631-B |
| 0.8750 | 2.6150 | 0.3438 | 17000 | | 4470 | | 1940 | | | | |

| Bearing Dimensions | | | | | Shaft | | | Housing | | Geometry Factors | | | Bearing Weight |
|--------------------|------------|-----------------------------|--|-----------------------------------|--|--|--|--|----------------|------------------|----------------|------|----------------|
| Width B | Width C | Eff. Dia. d ₁ | Outer Ring Regr. O.D. D ₁ | Flange Width C ₁ | Max Shaft File Radius R ⁽¹⁾ | Sealing Shoulder Dia. d ₂ | Sealing Shoulder Dia. d ₃ | Sealing Shoulder Dia. D ₁ | G ₁ | G ₂ | C ₀ | | kg |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | | | | | lbs. |
| 20.423 | 19.956 | -4.4 | 20.282 | 2.902 | 1.5 | 22.0 | 24.0 | 62.0 | 19.3 | 0.0 | 0.0588 | 0.47 | 1.04 |
| 1.0113 | 0.7908 | -0.17 | 2.7072 | 0.1169 | 0.06 | 1.26 | 1.34 | 2.44 | | | | | |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952335230 |
| Diam. intérieur | 22.225 mm |
| Diam. extérieur | 66.421 mm |
| Épaisseur | 8.725 mm |
| Conditionnement | 1 |

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE