


Roulement à aiguilles GBRI243720-UU-IKO - GBRI243720-UU-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/aiguilles/gbri243720-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

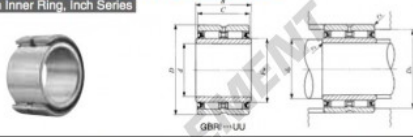

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
38.100 (1 1/2)	GBRI 243720 UU		330	38.100 (1 1/2)	58.738 (2 1/4)	31.750 (1 1/4)			
B	F _w	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		d _s Min.	d _s Max.	D _s Max.					r _{as} max. (⁽¹⁾)
32.000	44.450 (1 3/4)	43.3	43.4	53.7	0.6	58 900	114 000	1 800	LRBZ 242820

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383446
Diam. intérieur	38.1 mm
Diam. extérieur	58.738 mm
Épaisseur	31.75 mm
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE