


## Roulement à aiguilles GBRI446828-U-IKO - GBRI446828-U-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/aiguilles/gbri446828-u-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

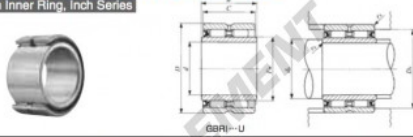

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
<b>69.850</b> (2 3/4)	<b>GBRI 446828 U</b>		1 490	69.850 ± 0.010	107.950 ± 0.010	44.450 ± 0.010			
B	F <sub>w</sub>	Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup>	Assembled inner ring		
		Min. d <sub>s</sub>	Max. D <sub>s</sub>					r <sub>as max</sub> <sup>(1)</sup>	
44.700	82.550 ± 0.010	77	79	99.9	1.5	127 000	231 000	950	LRBZ 445228

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383583
Diam. intérieur	69.85 mm
Diam. extérieur	107.95 mm
Épaisseur	44.45 mm
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE