


Roulement à aiguilles GBRI568032-UU-IKO - GBRI568032-UU-IKO

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/aiguilles/gbri568032-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

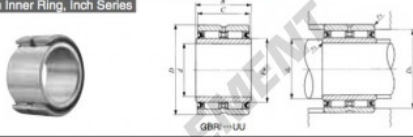

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
88.900 (3 1/2)	GBRI 568032 UU		2 130	88.900 (3 1/2)	127.000 (5)	50.800 (2)			
B	F _w	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		d ₄ Min.	d ₄ Max.	D ₄ Max.					r _{as max} ⁽¹⁾
51.050	101.600 (4)	97	99	119	1.5	182 000	395 000	800	LRBZ 566432

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383644
Diam. intérieur	88.9 mm
Diam. intérieur	3 1/2" inch
Diam. extérieur	127 mm
Diam. extérieur	5" inch
Epaisseur	50.8 mm
Epaisseur	2" inch
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE