


Galet de came avec axe CFES6-BR-IKO - CFES6-BR-IKO

<https://www.123roulement.com/roulement-palier/roulement-bille/galet-came-axe/cfes6-br-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Hexagon Hole

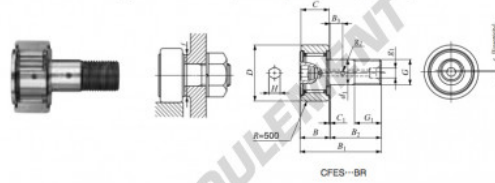

Stud dia. mm	Identification number						Mass (Ref.) g	D	C	d ₁						
	Shield type		Sealed type													
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring												
6	CFES 6 BR						18.5	16	11	6						
Boundary dimensions: mm																
G	G ₁	B max	B ₁ max	B ₂	B ₃	C ₁	g ₁	g ₂	H	ε ⁽¹⁾ K _{max}	Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
M 6×1	8	12.2	28.2	16	—	0.6	—	—	3	0.3	0.25	11	2.7	3 660	3 650	1 980

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952443362
Diam. intérieur	6 mm
Diam. extérieur	16 mm
Épaisseur	11 mm
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE