


Galet de came avec axe CFE16-UU-IKO - CFE16-UU-IKO

<https://www.123roulement.com/roulement-palier/roulement-bille/galet-came-axe/cfe16-uu-iko>

IKO
CAM FOLLOWERS
Eccentric Type Cam Followers **With Cage/With Screwdriver Slot**

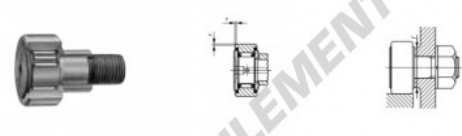

Outside diameter of eccentric roller, mm	Identification number				Mass (Ref.)					
	Shield type		Sealed type		g	D	C	d ₂		
22	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	CFE 16	UU	190	35	18	22

Boundary dimensions, mm										Eccentricity g	Mounting dimension f mm	Maximum tightening torque N-m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
G	B ₃	B max	B ₁ max	B ₂	C ₁	g ₁	G ₁	(1) r _{max}	e						
M16×1.5	15.5	19.6	52.1	32.5	0.8	6	17	0.6	0.8	26	58.5	12 000	18 300	18 300	

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060459985
Diam. intérieur	22 mm
Diam. intérieur	0.866" inch
Diam. extérieur	35 mm
Diam. extérieur	1.378" inch
Epaisseur	18 mm
Epaisseur	0.709" inch
Poids	190 g
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE