

## Rotule TAPR GIHN-KL-20LO-DURBAL - GIHN-KL-20LO-DURBAL


<https://www.123roulement.com/roulement-palier/rotule/tapr/gihn-kl-20lo-durbal>

### GIHN-KL-20LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

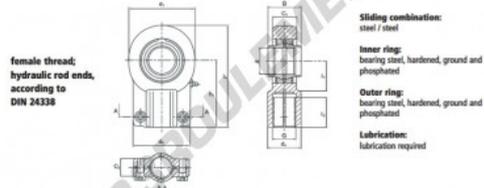

female thread:  
hydraulic rod ends,  
according to  
DIN 24338

Sliding combination:  
steel / steel  
Inner ring:  
bearing steel, hardened, ground and  
phosphated  
Outer ring:  
bearing steel, hardened, ground and  
phosphated  
Lubrication:  
lubrication required

order number	d	d <sub>1</sub>	measurement [mm]	G	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>
GIHN-KL 20 LO	20	47	M 16 x 1,5	25,0	47	20	17	17

type	l <sub>1</sub> min	measurement [mm]	l <sub>2</sub>	l <sub>3</sub>	load rating	weight
GIHN-K / GIHN-KL 20 LO	23	52	77,0	22	48,0 [kN]	0,40 [kg]

## CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952500119
Diam. intérieur	20 mm
Diam. extérieur	47 mm
Epaisseur	17 mm
Type	TAPR
Poids	400 g
Filetage	Filetage à gauche
Lubrification	avec
Conditionnement	1

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE