


## Roulement à aiguilles BHKM1730JU-JTEKT - BHKM1730JU-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-aiguilles/aiguilles/bhkm1730ju-jtekt>

Drawn cup needle roller bearings Koyo

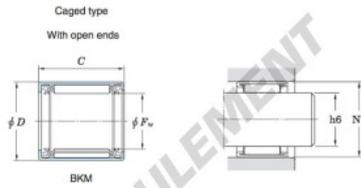

| Boundary dimensions (mm) |     |     | Basic load ratings (kN) |          | Limiting speeds (min <sup>-1</sup> ) |  | Bearing No. <sup>2)</sup> |                 |
|--------------------------|-----|-----|-------------------------|----------|--------------------------------------|--|---------------------------|-----------------|
| $F_w$                    | $D$ | $C$ | $C_r$                   | $C_{10}$ | Oil lub.                             |  | Caged type                |                 |
|                          |     |     |                         |          |                                      |  | With open ends            | With closed end |
| 17                       | 24  | 30  | 20.1                    | 31.3     | 11 000 <sup>1)</sup>                 |  | BHKM1730JU                |                 |

| Full complement type |                 | Recommended dimensions (mm) |        |                             |        | (Refer.) Mass (g) |                 |
|----------------------|-----------------|-----------------------------|--------|-----------------------------|--------|-------------------|-----------------|
| With open ends       | With closed end | Shaft dia. (φ6) min.        | max.   | Housing bore dia. (N7) min. | max.   | With open ends    | With closed end |
| —                    | —               | 16.989                      | 17.000 | 23.972                      | 23.993 | 35                | —               |

### CARACTÉRISTIQUES PRODUIT

|                 |               |
|-----------------|---------------|
| Marque          | JTEKT         |
| N° Ean13        | 4549250328763 |
| Diam. intérieur | 17 mm         |
| Diam. extérieur | 24 mm         |
| Épaisseur       | 30 mm         |
| Poids           | 35 g          |
| Conditionnement | 1             |
| Norme           | Sans norme    |

[contact@123roulement.com](mailto:contact@123roulement.com)

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE