


Roulement à rouleaux NN3017K-JTEKT - NN3017K-JTEKT

<https://www.123roulement.com/roulement-palier/roulement-rouleaux/rouleaux/nn3017k-jtekt>

Double-row cylindrical roller bearings ————— **Koyo**

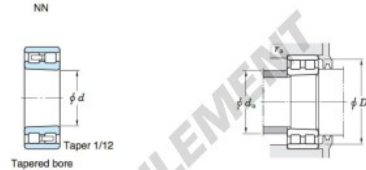

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.		
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{min}	<i>F</i> _w	<i>E</i> _w	<i>C</i> _r	<i>C</i> _{0r}	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
85	130	34	1.1	—	118	121	194	4 600	5 500	—	NN3017K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d</i> _a		<i>D</i> _a		<i>r</i> _a		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		91.5	—	—	123.5	119	1	1.63	1.58

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473772
Diam. intérieur	85 mm
Diam. extérieur	130 mm
Épaisseur	34 mm
Poids	1580 g
Conditionnement	1

contact@123roulement.com

03 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE